

### MCP1650-V002E26-PRO

Mellanox® MCP1650-V002E26 Compatible TAA 200GBase-CU QSFP56 to QSFP56 Direct Attach Cable (Passive Twinax, 2m)

#### Features

- Compliant with SFF-8636
- Support I2C two line strong interface, easy to control
- Compliant with IEEE802.3bj & IEEE802.3cd
- Operating Temperature: 0 to 70 Celsius
- Low Crosstalk
- Hot-pluggable
- RoHS Compliant and Lead-Free
- Low power



#### Applications:

- 10G/40G/100G/200G Ethernet
- Infiniband SDR, DDR, QDR, FDR, EDR, HDR
- Data center, cloud server

#### Product Description

This is a Mellanox® MCP1650-V002E26 Compatible 200GBase-CU QSFP56 to QSFP56 direct attach cable that operates over passive copper with a maximum reach of 2m. It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. We stand behind the quality of our products and proudly offer a limited lifetime warranty. This cable is TAA (Trade Agreements Act) compliant and is built to comply with MSA (Multi-Source Agreement) standards.

Proline's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products.



## Electrical Characteristics

Parameter		Requirement						Test Condition	
<b>Differential Impedance</b>									
<b>Cable Impedance</b>		105+5/-10Ω						Rise time of 25ps (20% ~ 80%).	
<b>Paddle Card Impedance</b>		100±10Ω							
<b>Cable Termination Impedance</b>		100±15Ω							
<b>Differential (Input/Output) Return Loss SDD11/SDD22</b>		$\text{Return\_loss}(f) \geq \left\{ \begin{array}{ll} 16.5-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the return loss at frequency f						10MHz≤f ≤19GHz	
<b>Differential to common mode (Input/Output) Return loss SCD11/SCD22</b>		$\text{Return loss}(f) \geq \left\{ \begin{array}{ll} 22-(20/25.78)f & 0.01 \leq f < 12.89 \\ 15-(6/25.78)f & 12.89 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the Differential to common-mode return loss at frequency f						10MHz≤f ≤19GHz	
<b>Common mode to common-mode (Input/Output) Return loss SCC11/ SCD22</b>		Return loss (f)≥ 2dB      0.2≤f≤19 Where f is the frequency in GHz Return loss (f) is the common-mode to common-mode return loss at frequency f						10MHz≤f ≤19GHz	
<b>Low Level Contact Resistance</b>		70 milliohms Max. From initial.						EIA-634-23: Apply a maximum voltage of 20mV and current of 100 mA.	
<b>Insulation Resistance</b>		10 Mohm (Min)						EIA364-21:AC 300V 1minute	
<b>Dielectric Withstanding Voltage</b>		NO disruptive discharge						EIA-364-20: Apply a voltage of 300 VDC for 1 minute between adjacent terminals and between adjacent terminals and ground	
<b>Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture</b>									
<b>Differential Insertion Loss (SDD21 Max)</b>	F AWG	1.25GHz	2.5GHz	5.0GHz	7.0GHz	10Ghz	12.89Ghz	10MHz≤f ≤19GHz	
	30(1m) Max.	4.5dB	5.4dB	6.3dB	7.5dB	8.5dB	10.5dB		
	30/28(3m)Max.	7.5dB	9.5dB	12.2dB	14.8dB	18.0dB	21.5dB		
	26(3m) Max.	5.7dB	7.2dB	9.9 dB	11.9dB	14.1dB	16.5dB		
	26/25(5m)Max.	7.8dB	10.0dB	13.5dB	16.0dB	19.0dB	22.0dB		
<b>Insertion Loss Deviation</b>		-0.176*f - 0.7 ≤ ILD ≤ 0.176* f + 0.7						50MHz≤f ≤19GHz	
<b>Differential to common mode conversion Loss-Differential Insertion Loss (SCD21-SDD21)</b>		$10 \quad 0.01 \leq f < 12.89$ $\text{Conversion loss}(f) - \text{IL}(f) \geq \left\{ \begin{array}{ll} 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Conversion loss (f) is the cable assembly differential to common-mode conversion loss IL (f) is the cable assembly insertion loss						10MHz≤f ≤19GHz	

MDNEXT (multiple disturbers near-end crosswalk)	≥26dB @12.89GHz	10MHz≤f ≤19GHz
Intra Skew	15ps/m	10MHz≤f ≤19GHz

### Environment Performance

Parameter	Requirement	Test Condition
Operating Temperature Range	-20°C to +76°C	Cable operating temperature range
Storage Temperature Range	-40°C to +80°C	Cable storage temperature range in packed condition
Thermal Cycling Non-Powered	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min, dwells
Salt Spraying	48 hours salt spraying after shell corrosive area less than 5%	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing (For connector only)	EIA-364-35 Class II, 14 days.
Temp. Life	No evidence of physical damage	EIA-364-17C w/RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H No evidence of physical damage	Condition: -20°C ±2°C, mandrel diameter is 6 times the cable diameter.

### Mechanical and Physical Characteristics


Parameter	Requirement	Test Condition
Vibration	Pass electrical tests per 3.1 after stressing	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to cable plug below 90N. Per SFF-8432 Rev 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing	Clamp and shock per EIA-364-27B, TC- G,3 times in 6 directions, 100g, 6ms.
Cable Plug Insertion	40N Max (QSFP28)	Per SFF8661 Rev 2.1
Cable plug Extraction	30N Max (QSFP28)	Place axial load on de-latch to de-latch plug. Per SFF8661 Rev 2.1

<b>Durability</b>	50 cycles, No evidence of physical damage	EIA-364-09, perform plug & unplug cycles: Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB)
-------------------	---	--

### Wiring Diagram

X1	X2	Remarks	X1	X2	Remarks
18 (RX1-)	37(TX1-)	Pair	37(TX1-)	18 (RX1-)	Pair
17 (RX1+)	36 (TX1+)		36 (TX1+)	17 (RX1+)	
15 (RX3-)	34 (TX3-)	Pair	34 (TX3-)	15 (RX3-)	Pair
14 (RX3+)	33 (TX3+)		33 (TX3+)	14 (RX3+)	
6 (TX4+)	25 (RX4+)	Pair	25 (RX4+)	6 (TX4+)	Pair
5 (TX4-)	24 (RX4-)		24 (RX4-)	5 (TX4-)	
3 (TX2+)	22 (RX2+)	Pair	22 (RX2+)	3 (TX2+)	Pair
2 (TX2-)	21 (RX2-)		21 (RX2-)	2 (TX2-)	
1, 4, 7, 13, 16, 19, 20, 23, 26, 32,35,38	1, 4, 7, 13, 16, 19,20, 23, 26, 32, 35, 38	GND	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	EEPROM point at both ends

### Mechanical Specifications

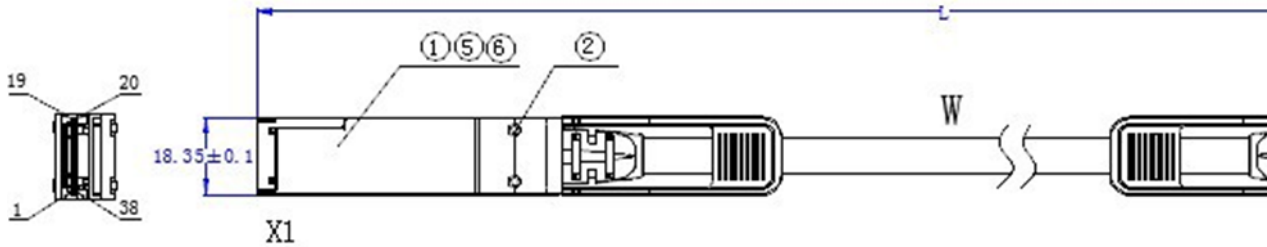

UNIT: mm

**About Us:**

Proline Options is one of North America's leading providers of transceivers and high speed cabling. With a reputation for quality, tested products that cover the connectivity spectrum, Proline Options has a solution for you regardless of the specification.

At Proline Options, every product is tested in its intended application - never batch or spec tested only. We run bandwidth, distance and IOS network tests. We have documented an impressive 0.03% failure rate over the last 10 years. To continue this rate of success we invest millions annually in our own on-site testing lab.



Tel: 855.933.3223

Email: [sales@prolineoptions.com](mailto:sales@prolineoptions.com)

Email: [techsupport@prolineoptions.com](mailto:techsupport@prolineoptions.com)

Web: <https://www.prolineoptions.com>