

882251-B21-PRO

HP® 882251-B21 Compatible TAA Compliant 100GBase-SR4 QSFP28 Transceiver (MMF, 850nm, 100m, DOM, 0 to 70C, MPO)

Features

- Supports 103.1Gbps and 112.2Gbps Aggregate Bit Rates
- Up to 70m Transmission on MMF OM3, and 100m Transmission on MMF OM4
- Single 3.3V Power Supply and Power Dissipation < 3.5W
- Class 1 FDA and IEC60825-1 Laser Safety Compliant
- I2C Interface with Integrated Digital Diagnostic Monitoring
- Hot-Pluggable QSFP28 Footprint
- RoHS6 Compliant
- Operating Temperature: 0C to 70C



Applications:

- 100GBase Ethernet
- Access and Enterprise

Product Description

This HP® 882251-B21 compatible QSFP28 transceiver provides 100GBase-SR4 throughput up to 100m over OM4 multi-mode fiber (MMF) using a wavelength of 850nm via an MPO connector. It is guaranteed to be 100% compatible with the equivalent HP® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Proline's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products.



Absolute Maximum Ratings

Parameter	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage	Vcc	-0.5		3.6	V
Storage Temperature	Ts	-40		+85	°C
Case Operating Temperature	Тс	0		70	°C
Operating Relative Humidity	RH	5		85	%

Notes:

1. Exceeding any one of these values may destroy the device immediately.

Electrical Characteristics


Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Power Consumption	Р			3.5	W	
Transmitter						
Input Amplitude (Differential)	Vin	150		1050	mVpp	AC coupled inputs
Input Impedance (Differential)	Zin	85	100	115	ohms	Rin > 100 kohms @ DC
Receiver						
Output Amplitude (Differential)	Vout	200		1100	mVpp	AC coupled outputs
Output Impedance (Differential)	Zout	85	100	115	ohms	
Output Rise/Fall Time	tr/tf		12		ps	20%~80%

Optical Characteristics 100GBASE-SR4 Ethernet Operation

Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes
Transmitter						
Signaling Speed per Lane	BRAVE		25.78		Gbps	
Center Wavelength	λC	840	850	860	nm	
Average Launch Power, Each Lane	Pout/lane	-8.4		2.4	dBm	1
Optical modulation amplitude	Poma			3	dBm	
Extinction Ratio	ER	3			dB	
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3}		IEEE 802.3bm 100Gbase-SR4				2
Receiver						
Signaling Speed per Lane	BRAVE	25.78		28.05	Gbps	
Center Wavelength	λC	840	850	860	nm	
Average Receive Power per Lane	Rpow	-10.3		2.4	dBm	
Stressed Receive Sensitivity in OMA per Lane	Pmin			-5.2	dBm	3
Receive Sensitivity in OMA per Lane	Pmin			-8	dBm	3
LOS Assert	LOSA	-20			dBm	
LOS De-Assert	LOSD			-12	dBm	
LOS Hysteresis	_	0.5	_		dB	

Notes:

- 1. Output is coupled into a 50/125μm multi-mode fiber.
- 2. Filtered, measured with a PRBS 2³¹-1 test pattern @25.78Gbps.
- 3. Receive sensitivity measured at BER less than 5E-5, with a 2³¹-1 PRBS @25.78Gbps.

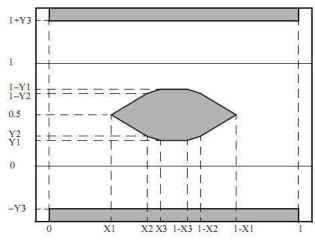

Normalized time (Unit Interval)

Optical Characteristics OTU4 and 128G Fiber Channel Operation


Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes
Transmitter						
Signaling Speed per Lane	BRAVE	27.95		28.05	Gbps	1
Center Wavelength	λC	840	850	860	nm	
Average Launch Power, Each Lane	Pout/lane	-2.5		2.4	dBm	2
Optical modulation amplitude	Poma			3	dBm	
Extinction Ratio	ER	3			dB	
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3}		FC-PI-6				3
Receiver						
Signaling Speed per Lane	BRAVE	27.95		28.05	Gbps	
Center Wavelength	λC	840	850	860	nm	
Average Receive Power per Lane	Rpow	-10.2		2.4	dBm	
Receive Sensitivity in OMA per Lane	Pmin			-6	dBm	4
LOS Assert	LOSA	-20			dBm	
LOS De-Assert	LOSD			-12	dBm	
LOS Hysteresis		0.5			dB	

Notes:

1. This module will work at 103.1Gbps (25.78Gbpsx4) in default. To work at 112.2Gbps (28.05Gbpsx4), Page 00 bytes 87-88 (Rx and Tx Rate Select) need to be written with 0xFF to enable rate select (refer to SFF-8636), which will lose to default when powered off.

Page 00 Byte 87	Page 00 Byte 88	Data Rate
0xAA	0xAA	103.1Gbps (Default)
0xFF	0xFF	112.2Gbps

- 2. Output is coupled into a 50/125μm multi-mode fiber.
- 3. Filtered, measured with a PRBS 2³¹-1 test pattern @28.05Gbps.
- 4. Receive sensitivity measured at BER less than 1E-6, with a 2³¹-1 PRBS @28.05Gbps.

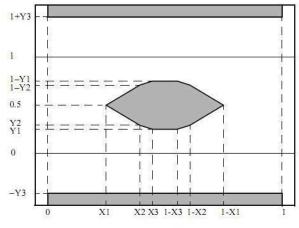

Normalized time (Unit Interval)


Pin Descriptions

Pin Logic Symbol Name/Descriptions 1 GND Ground 2 CML-I Tx2n Transmitter Inverted Data Input 3 CML-I Tx2p Transmitter Non-Inverted Data Input 4 GND Ground 5 CML-I Tx4p Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx1p Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2n Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx2n Receiver Inverted Data Output 25 CML-O Rx2n Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O Rx4p Receiver Non-Inverted Data Output 28 CML-O Rx4p Receiver Non-Inverted Data Output 29 Receiver Non-Inverted Data Output 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4p Receiver Non-Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrst. Module Present 28 LVTTL-O IntL Interrupt 30 VccTx +3.3V Power supply transmitter	
2 CML-I Tx2n Transmitter Inverted Data Input 3 CML-I Tx2p Transmitter Non-Inverted Data Input 4 GND Ground 5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1n Receiver Inverted Data Output 18 CML-O Rx2n Receiver Inverted Data Output 20 GND Ground 21 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output	Ref.
3 CML-I Tx2p Transmitter Non-Inverted Data Input 4 GND Ground 5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2p Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4n Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O Rx4p Receiver Non-Inverted Data Output 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
4 GND Ground 5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VCCRx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4n Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VCCTX +3.3V Power supply transmitter	
5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2n Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4n Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O Rx4p Receiver Non-Inverted Data Output 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O Rx4p Receiver Inverted Data Output 28 LVTTL-O ModPrsL Module Present 29 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4p Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
9 LVTTL-I ResetL Module Reset 10 VccRx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2n Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4p Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
10 VccRx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Non-Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Non-Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	2
13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
GND Ground CML-O Rx4n Receiver Inverted Data Output CML-O Rx4p Receiver Non-Inverted Data Output GND Ground VUTTL-O ModPrsL Module Present LVTTL-O IntL Interrupt VCCTx +3.3V Power supply transmitter	
24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	
28 LVTTL-O IntL Interrupt 29 VccTx +3.3V Power supply transmitter	1
29 VccTx +3.3V Power supply transmitter	
30 Vcc1 +3.3V Power supply	2
	2
31 LVTTL-I LPMode Low Power Mode	
32 GND Ground	1
33 CML-I Tx3p Transmitter Non-Inverted Data Input	
34 CML-I Tx3n Transmitter Inverted Data Input	
35 GND Ground	1
36 CML-I Tx1p Transmitter Non-Inverted Data Input	
37 CML-I Tx1n Transmitter Inverted Data Input	
38 GND Ground	1


Notes:

- 1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
- 2. Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Vcc Rx, Vcc1 and Vcc Tx may be internally connected within the QSFP28 Module in any combination. The connector pins are each rated for a maximum current of 500mA.

Electrical Pin-out Details

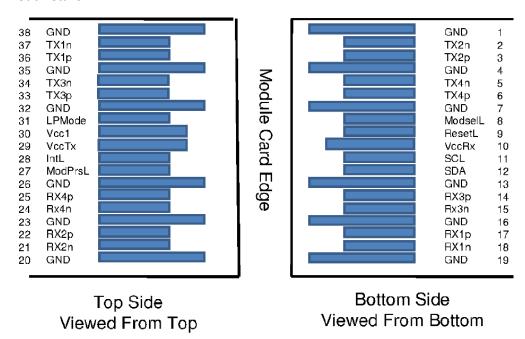

Mechanical Specifications

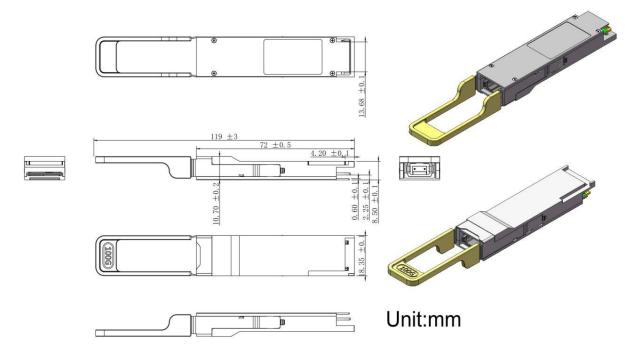

About Us:

Proline Options is one of North America's leading providers of transceivers and high speed cabling. With a reputation for quality, tested products that cover the connectivity spectrum, Proline Options has a solution for you regardless of the specification.

At Proline Options, every product is tested in its intended application - never batch or spec tested only. We run bandwidth, distance and IOS network tests. We have documented an impressive 0.03% failure rate over the last 10 years. To continue this rate of success we invest millions annually in our own on-site testing lab.



Tel: 855.933.3223

Email: sales@prolineoptions.com

Email: techsupport@prolineoptions.com Web: https://www.prolineoptions.com