

PRO-HDBPC3MP12LCDS2

Rack Mount High Density Cassette Base-8 3x MPO-12 In, 12x LC Out, Single-mode Duplex OS2

Features

- 3x Base-8 in One Cassette Tray
- 12x Duplex LC/UPC adapters
- 3x MPO/APC Male adapter
- Single-mode OS2
- All adapters and pigtails in included in cassette




Product Description


This is an MPO fiber optic cassette high density interchangeable patch panel with 3x MPO-12 in and 12x LC duplex out, single-mode OS2. It is a highly flexible fiber management unit for use in our High Density Chassis for a maximum of 567-fibers in 4U. We providing you with an integrated, cost effective solution for all of your network upgrade needs.

Specifications

Parameter	Specification	Unit
Dimensions	277.25 (L) x 198 (W) x 12.5 (H)	mm
LC Connector	LC Adapter Key Up.	
MPO Connector	MPO Adapter Key Down. Blue, Aqua, Orange, Pink, Green, Purple, Brown, and Yellow.	
Dust Caps	Blue, Aqua, Orange, Pink, Green, Violet, Brown, and Yellow.	
Insertion Loss	MPO≤0.7. LC≤0.2.	dB
Return Loss	MPO≥60. LC≥55.	dB

Mechanical Specifications

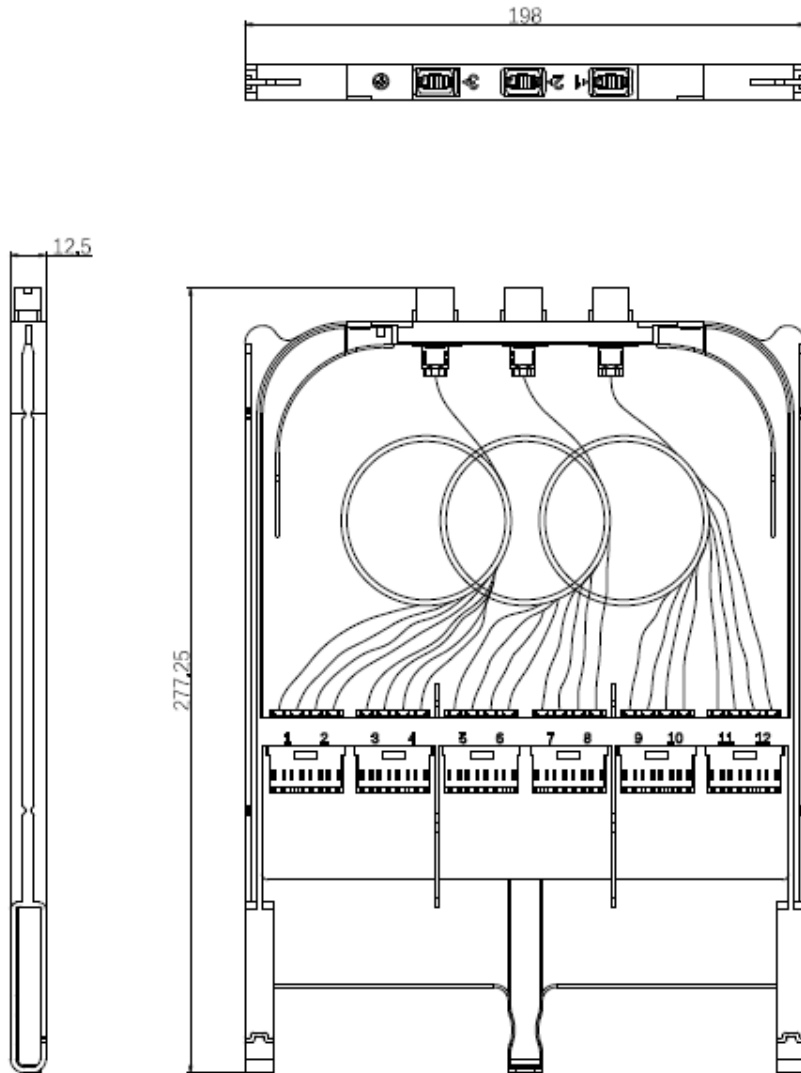

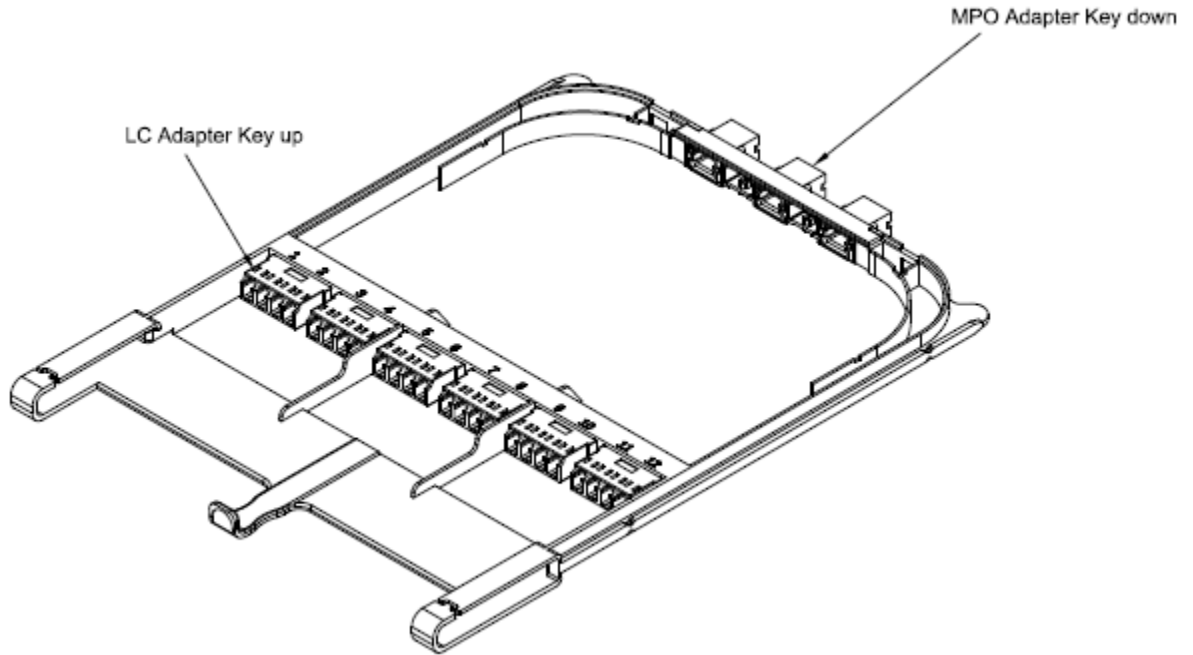

MPO 1

1	2	3	4
Blue	Aqua	Orange	Pink
Green	Purple	Brown	Yellow

MPO 2

5	6	7	8
Blue	Aqua	Orange	Pink
Green	Purple	Brown	Yellow

MPO 3

9	10	11	12
Blue	Aqua	Orange	Pink
Green	Purple	Brown	Yellow

About Us:

Proline Options is one of North America's leading providers of transceivers and high-speed cabling. With a reputation for quality, tested products that cover the connectivity spectrum, Proline Options has a solution for you regardless of the specification.

At Proline Options, every product is tested in its intended application - never batch or spec tested only. We run bandwidth, distance and IOS network tests. We have documented an impressive 0.03% failure rate over the last 10 years. To continue this rate of success we invest millions annually in our own on-site testing lab.

Tel: 855.933.3223

Email: sales@prolineoptions.com

Email: techsupport@prolineoptions.com

Web: <https://www.prolineoptions.com>