

### SFP25G-LR-S-I-DW5252-PRO

Cisco® SFP25G-LR-S-I-DW5252 Compatible TAA Compliant 25GBase-DWDM 100GHz SFP28 Transceiver (SMF, 1552.52nm, 10km, DOM, -40 to 85C, LC)

#### Features

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Industrial Temperature -40 to 85 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



#### Applications:

- 25GBase-LR Ethernet
- Access, Metro and Enterprise

#### Product Description

This Cisco® SFP25G-LR-S-I-DW5252 compatible SFP28 transceiver provides 25GBase-DWDM throughput up to 10km over single-mode fiber (SMF) using a wavelength of 1552.52nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Proline's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products.



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Wavelength Guide (100GHz ITU Channels)

| Channel | Wavelength(nm) | Frequency(THZ) | Channel | Wavelength(nm) | Frequency(THZ) |
|---------|----------------|----------------|---------|----------------|----------------|
| D21     | 1560.61        | 192.1          | D41     | 1544.53        | 194.1          |
| D22     | 1559.79        | 192.2          | D42     | 1543.73        | 194.2          |
| D23     | 1558.98        | 192.3          | D43     | 1542.94        | 194.3          |
| D24     | 1558.17        | 192.4          | D44     | 1542.14        | 194.4          |
| D25     | 1557.36        | 192.5          | D45     | 1541.35        | 194.5          |
| D26     | 1556.55        | 192.6          | D46     | 1540.56        | 194.6          |
| D27     | 1555.75        | 192.7          | D47     | 1539.77        | 194.7          |
| D28     | 1554.94        | 192.8          | D48     | 1538.98        | 194.8          |
| D29     | 1554.13        | 192.9          | D49     | 1538.19        | 194.9          |
| D30     | 1553.33        | 193.0          | D50     | 1537.4         | 195.0          |
| D31     | 1552.52        | 193.1          | D51     | 1536.61        | 195.1          |
| D32     | 1551.72        | 193.2          | D52     | 1535.82        | 195.2          |
| D33     | 1550.92        | 193.3          | D53     | 1535.04        | 195.3          |
| D34     | 1550.12        | 193.4          | D54     | 1534.25        | 195.4          |
| D35     | 1549.32        | 193.5          | D55     | 1533.47        | 195.5          |
| D36     | 1548.51        | 193.6          | D56     | 1532.68        | 195.6          |
| D37     | 1547.72        | 193.7          | D57     | 1531.9         | 195.7          |
| D38     | 1546.92        | 193.8          | D58     | 1531.12        | 195.8          |
| D39     | 1546.12        | 193.9          | D59     | 1530.33        | 195.9          |
| D40     | 1545.32        | 194.0          | D60     | 1529.55        | 196.0          |

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min.  | Typ. | Max.  | Unit | Notes |
|----------------------------|--------|-------|------|-------|------|-------|
| Maximum Supply Voltage     | Vcc    | -0.3  |      | 4.0   | V    |       |
| Storage Temperature        | TS     | -40   |      | 85    | °C   |       |
| Operating Case Temperature | Tc     | -40   |      | 85    | °C   |       |
| Relative Humidity          | RH     | 0     |      | 85    | %    |       |
| Data Rate                  | BR     | 24.33 |      | 25.78 | Gbps |       |

## Electrical Characteristics

| Parameter                          | Symbol                    | Min.            | Typ. | Max.                 | Unit  | Notes |
|------------------------------------|---------------------------|-----------------|------|----------------------|-------|-------|
| Supply Voltage                     | V <sub>CC</sub>           | 3.13            |      | 3.47                 |       |       |
| Power Dissipation                  | PD                        |                 |      | 2.0                  | W     |       |
| <b>Transmitter</b>                 |                           |                 |      |                      |       |       |
| Data Input Swing Differential      | V <sub>IN</sub>           | 190             |      | 1000                 | mV    |       |
| Differential line input Impedance  | R <sub>IN</sub>           | 80              | 100  | 120                  | Ohm   |       |
| Transmitter Fault Output-High      | V <sub>FaultH</sub>       | 2               |      | V <sub>CC</sub> +0.3 | V     |       |
| Transmitter Fault Output-Low       | V <sub>FaultL</sub>       | V <sub>EE</sub> |      | V <sub>EE</sub> +0.8 | V     |       |
| Transmitter Disable Voltage-High   | V <sub>DisH</sub>         | 2               |      | V <sub>CC</sub> +0.3 | V     |       |
| Transmitter Disable Voltage- low   | V <sub>DisL</sub>         | V <sub>EE</sub> |      | V <sub>EE</sub> +0.8 | V     |       |
| <b>Receiver</b>                    |                           |                 |      |                      |       |       |
| Differential line Output Impedance | R <sub>OUT</sub>          | 80              | 100  | 120                  | Ohm   |       |
| Differential Data Output Voltage   | V <sub>DR</sub>           | 350             |      | 850                  | mVp-p |       |
| LOS Output Voltage-High            | V <sub>LOSH</sub>         | 2               |      | V <sub>CC</sub> +0.3 | V     |       |
| LOS Output Voltage-Low             | V <sub>LOSL</sub>         | V <sub>EE</sub> |      | V <sub>EE</sub> +0.8 | V     |       |
| <b>Others</b>                      |                           |                 |      |                      |       |       |
| Cold-Start time                    | T <sub>start-cooled</sub> |                 |      | 35                   | s     |       |

## Optical Characteristics

| Parameter  | Symbol                | Min.    | Typ. | Max.    | Unit  | Notes |
|--|-----------------------|---------|------|---------|-------|-------|
| <b>Transmitter</b>   |                       |         |      |         |       |       |
| Wavelength   | $\lambda$             | 1529.55 |      | 1560.61 | nm    |       |
| Center Wavelength Spacing                                    |                       | 100     |      |         | GHz   |       |
| Average Launched Power                                       | P <sub>O</sub>        | -1      |      | 5       | dBm   |       |
| Extinction Ratio   | ER                    | 6       |      |         | dB    |       |
| Average Launched Power (Laser Off)                           | P <sub>off</sub>      |         |      | -30     | dBm   |       |
| Side-Mode Suppression Ratio                                  | SMSR                  | 30      |      |         | dB    |       |
| Relative Intensity Noise                                     | RIN <sub>20 OMA</sub> |         |      | -130    | dB/Hz |       |
| <b>Receiver</b>  |                       |         |      |         |       |       |
| Center Wavelength  | $\lambda_{IN}$        | 1260    |      | 1620    | nm    |       |
| Receiver Overload  | P <sub>overload</sub> | 2       |      |         | dBm   |       |
| Receiver Sensitivity @5E-5 BOL                               | P <sub>sen BOL</sub>  |         |      | -15     | dBm   |       |
| Receiver Sensitivity @5E-5 EOL                               | P <sub>sen EOL</sub>  |         |      | -14.5   | dBm   | 1     |
| Receiver Sensitivity @5E-5 EOL after 10km fiber transmission | P <sub>sen1 EOL</sub> |         |      | -9.0    | dBm   | 1     |
| Los Of Signal Assert   | PA                    | -30     |      |         | dBm   |       |
| Los Of Signal De-assert                                      | PD                    |         |      | -16     | dBm   |       |
| LOS -Hysteresis  | P <sub>Hys</sub>      | 0.5     |      | 6       | dB    |       |

### Notes:


1. Measured at 5E-5, ER>4dB, PRBS 2<sup>31</sup> -1

## Pin Descriptions

| Pin | Symbol  | Name/Descriptions  | Ref. |
|-----|---------|--|------|
| 1   | VEET    | Transmitter Ground   | 1    |
| 2   | TFAULT  | Transmitter Fault  | 2    |
| 3   | TDIS    | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | SDA     | 2-wire Serial Interface Data Line                              | 2    |
| 5   | SCL     | 2-wire Serial Interface Clock Line                             | 2    |
| 6   | MOD_ABS | Module Absent. Grounded within the module                      | 2    |
| 7   | NA      | Not Used   |      |
| 8   | RX_LOS  | Loss of Signal indication. Logic 0 indicates normal operation. | 4    |
| 9   | NA      | No Used  |      |
| 10  | VEER    | Receiver Ground  | 1    |
| 11  | VEER    | Receiver Ground  | 1    |
| 12  | RD-     | Receiver Inverted DATA out. AC Coupled.                        |      |
| 13  | RD+     | Receiver Non-inverted DATA out. AC Coupled.                    |      |
| 14  | VEER    | Receiver Ground  | 1    |
| 15  | VCCR    | Receiver Power Supply  | 5    |
| 16  | VCCT    | Transmitter Power Supply                                       | 5    |
| 17  | VEET    | Transmitter Ground   | 1    |
| 18  | TD+     | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-     | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VEET    | Transmitter Ground   | 1    |


### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>cc</sub> + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
5. Internally connected

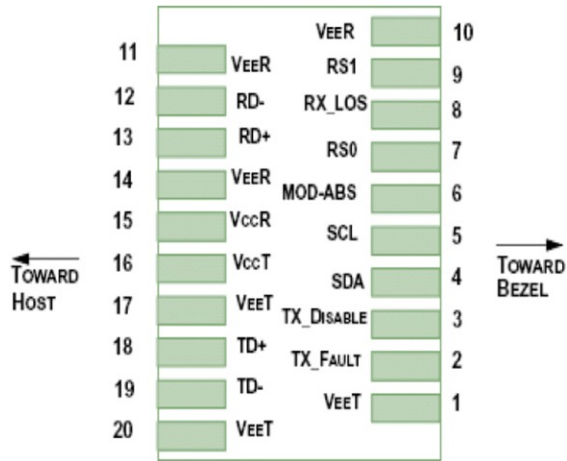


Pin-out of connector Block on Host board


### Block Diagram of Transceiver

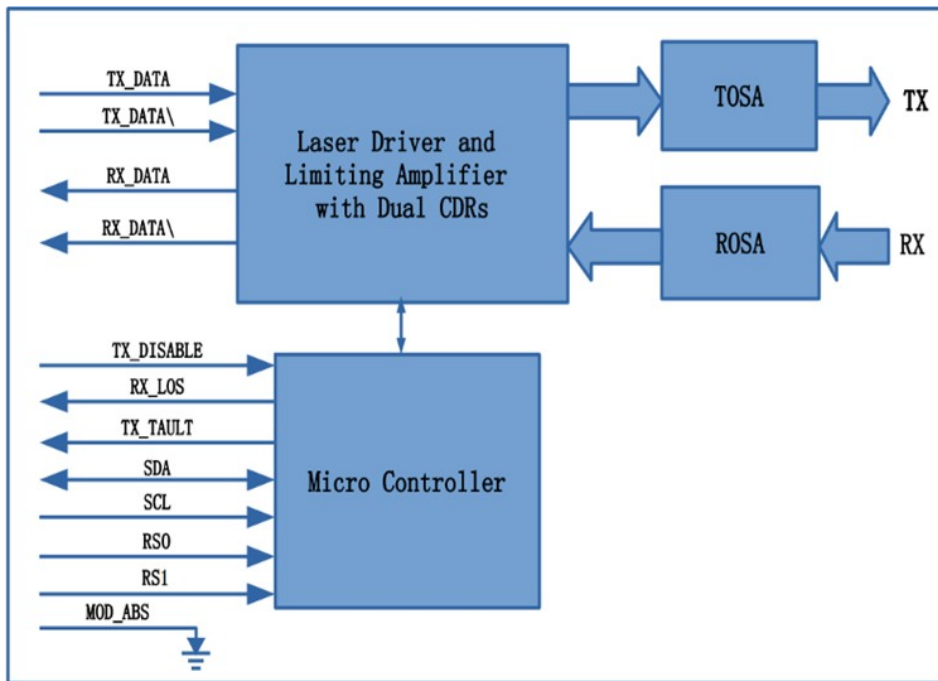

## Recommended Interface Circuit

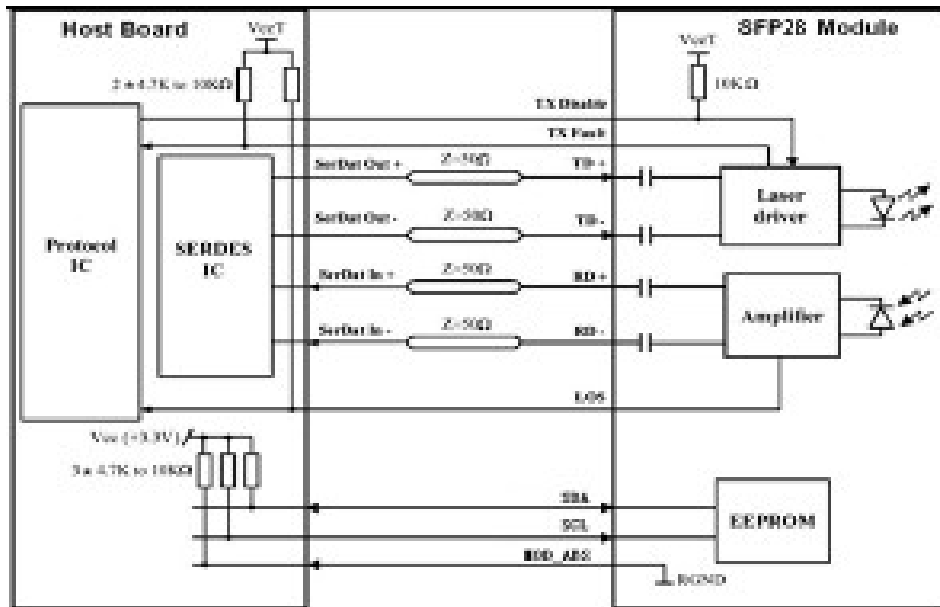

## Mechanical Specifications

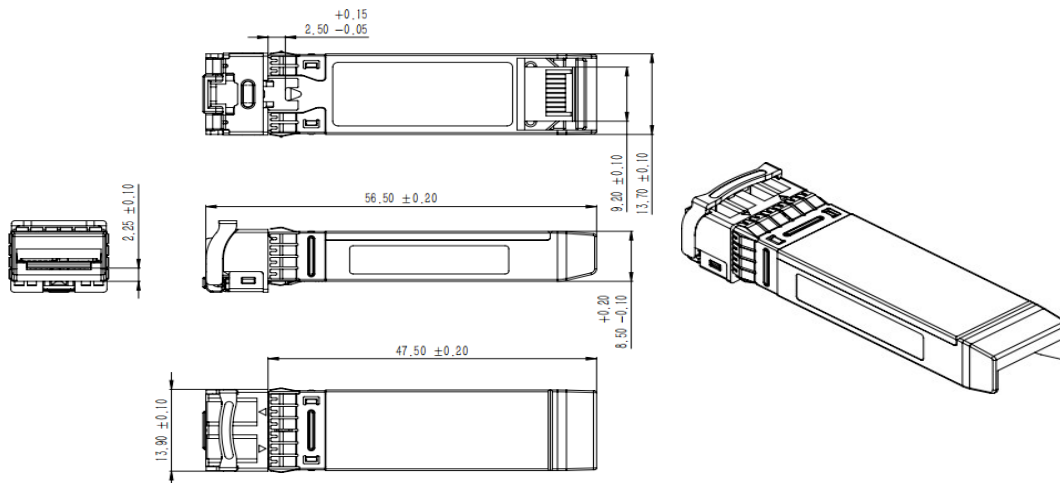

**About Us:**

Proline Options is one of North America's leading providers of transceivers and high speed cabling. With a reputation for quality, tested products that cover the connectivity spectrum, Proline Options has a solution for you regardless of the specification.

At Proline Options, every product is tested in its intended application - never batch or spec tested only. We run bandwidth, distance and IOS network tests. We have documented an impressive 0.03% failure rate over the last 10 years. To continue this rate of success we invest millions annually in our own on-site testing lab.



Tel: 855.933.3223

Email: [sales@prolineoptions.com](mailto:sales@prolineoptions.com)

Email: [techsupport@prolineoptions.com](mailto:techsupport@prolineoptions.com)

Web: <https://www.prolineoptions.com>